

说到做到
值得托付

HUAMEI
BUILDING
华美建材
— SINCE 2006 —

 **Huamei** 华美 · 出品

山东华美建材有限公司 SHANDONG HUAMEI BUILDING MATERIALS CO.,LTD.

☎ +86 539 8469986

🌐 www.china-huamei.com

✉ lyhuamei@lyhuamei.com

🌐 www.huameiacoustic.com

📍 山东省临沂市罗庄区侯三岗村 Luozhuang District, Linyi City, Shandong Province, China

企业概况

Enterprise profile

Huamei

山东华美建材有限公司（原临沂华美石膏建材有限公司）位于山东省临沂市，是一家集研发、设计、生产室内吊顶、墙面装饰材料及专用机械设备的科技创新型企业。公司创建于2006年，注册资本1000万元，在职员工160人。公司技术力量雄厚，生产设备先进，产品类别齐全，服务质量优良。公司自主研发的产品专业机械设备，可保证所生产的产品具有精准的规格尺寸和优质的产品质量，产品已覆盖国内各个省、市、自治区及世界50余个国家和地区。公司“腾远”牌商标被评为“山东省著名商标”。

经过公司十几年的不懈努力，玻纤产品以其卓越的性能和高雅的品质畅销国内外，供不应求。年产量已达到180万平方米，是国内玻纤制品行业的龙头企业。国内销量为120万平方米，位居全国前列，占国内市场同类产品销量70%；国外销量为60万平方米，占国际市场同类产品销量25%。

1、企业荣誉：公司秉承“质量为本，诚信服务”的宗旨，赢得了社会各界的广泛认可，多次被山东省工商行政管理局评为“山东省守合同重信用企业”、“山东省行业十佳品牌”、“临沂市贸促会优秀会员企业”、“临沂市安全生产标准化三级企业”、“临沂市优秀班组”、罗庄区“文明诚信私营企业”、“科技进步奖”、“经济发展金奖”、“先进企业”、“明星企业”、“学习型组织先进单位”获得“创新管理进步奖银奖”及“劳动关系和谐企业”等40余项荣誉称号。

2、企业资质：2000年通过了ISO9001质量管理体系认证和ISO14001环境管理体系认证；获取韩国最高消防认证(KFI)；欧洲标准防火及检测认证，取得了CE证书；国家防火吸音检测认证；2012年通过临沂市环保局环境评价的验收。

3、创新技术：注重锐意创新及科技创新成果转化。自2006年至今已累计申请发明专利、实用新型专利、外观专利共计20余项，其中发明专利3项，实用新型7项。2019年7月已申报第一批国家高新技术企业(正在评审中)；2019年8月已申报临沂市重点实验室及临沂市工程技术研究中心。

4、安全生产：2014年通过“安全生产标准化三级”验收；2018年通过“安全生产风险分级管控和隐患排查”双重预防体系建设及“职工职业卫生安全”、“生产安全事故风险”、“生产安全事故应急预案”的编制、评估、验收。

5、设备研发：公司研发团队利用丰富的生产实践经验，根据高端市场需求设计研发出各类产品的生产设备，可实现对产品精准切割，达到边部光滑、规格尺寸零误差，凭借产品的高品质成功进入国内、外体育场馆、会议厅堂、娱乐场所等高端项目的装饰装潢，进一步提升了我在国内国际玻纤制品行业的知名度，为今后的长远发展奠定了坚实基础。

Shandong Huamei Building Materials Co., Ltd. (formerly Linyi Huamei Gypsum Building Materials Co., Ltd.) is located in Linyi City, Shandong Province. It is a technological innovative enterprise that integrates research and development, design and production of indoor ceiling, wall decoration materials and special mechanical equipment. It was founded in 2006, the registered capital is 10 million yuan and has more than 160 employees. The company has strong technical force, advanced production equipment, complete product categories and excellent service. The self-developed professional machinery and equipment can ensure accurate specifications and size together with high quality of the products. Our products have covered all provinces, municipalities, autonomous regions of China, and more than 50 countries and regions of the world. "Tengyuan" brand trademark of the company has been awarded the "Shandong Province Famous Trademark".

After more than ten years of unremitting efforts, fiberglass products have won a lot of customers both at home and abroad because of its excellent performance and elegant quality. The annual output has reached 1.8 million square meters, which make the company to be the leading enterprise in the glass fiber products industry in China. The 1.2 million square meters of the domestic sales ranking in the forefront of the country, accounting for 70% of the domestic market sales of similar products, and the 600,000 square meters exporting sales, accounting for 25% of the international market sales of similar products.

1. Enterprise Honour: Adhering to the tenet of "Quality-oriented, Sincerity service", the company has won wide acceptance from all walks of life. It has been repeatedly appraised by Shandong Administration for Industry and Commerce as "Shandong contract-abiding and credit-abiding enterprise", "Shandong Top Ten Brands of Industry", "Excellent Member of Linyi Trade Promotion Association Enterprise", "The third grade enterprise of safety production standardization of Linyi City", "Excellent Team of Linyi City", "Civilized and honest private enterprises in Luozhuang District", "Prizes for scientific and technological Progress", "Golden prizes for economic development", "Advanced Enterprises", "Star enterprise", and "Advanced units of learning organiza-

tions", besides we were awarded "Silver Prize for Innovative Management Progress" and "Harmony of Labor Relations", Totally we got more than 40 honorary titles

2. Enterprise qualification: In 2000, it passed the certification of ISO 9001 quality management system and ISO 14001 environmental management system; obtained the highest fire protection certification of Korea (KFI); European standard fire prevention and testing certification, and obtained CE certificate; national fire prevention and sound absorption testing certification; and passed the environmental assessment acceptance of Linyi Environmental Protection Bureau in 2012.

3. Innovative technology: We are focusing on innovation and transformation of scientific and technological innovation achievements. From 2006 till now, there are more than 20 patents have been applied for invention, utility model and appearance, 3 of which are invention patents and 7 are utility models. It has declared the first batch of state high-tech enterprises (under review) in July 2019, and meanwhile, it has declared Linyi Key Laboratory and Linyi Engineering Technology Research Center in August 2019.

4. Safety production: It has passed the acceptance of "three-level standardization of safety production" in 2014; and it has passed the construction of the double prevention system of "graded management and control of safety production risks and investigation of hidden dangers" and the compilation, evaluation and acceptance of "occupational health safety of workers", "risk of production safety accidents", "emergency plan of production safety accidents" in 2018.


5. Equipment R&D: The R&D team of the company utilizes abundant production practice experience to design and develop production equipment of various products according to the high-end market demand, which can realize precise cutting of products, achieve smooth edges, zero error in size and Specifications. Our products are widely applied in sports venues, conference halls and where has the demands of high quality ceiling products. It improves the popularity of our company in the domestic and international fiberglass industry and lays a solid foundation for the long-term development in the future.

天花系统

Ceiling Decoration System

- 1 玻纤系列产品
FIBERGLASS CEILING PRODUCTS
- 2 岩棉系列产品
ROCKWOOL CEILING PRODUCTS
- 3 石膏系列产品
GYPSUM CEILING PRODUCTS

Structure / 结构

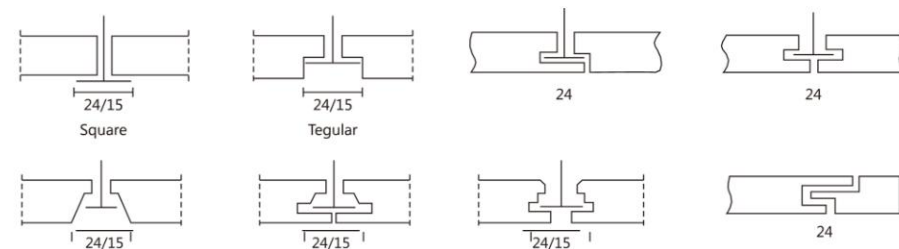

Face / 花色




Main characteristic / 主要产品特性

Excellent sound insulation/最佳的吸音功能
Excellent fire-resistant/最佳的防火功能
Light weight and no sagging, warping or delaminating /质轻, 不易变形
Green eco-friendly building material/绿色环保建材



Application / 应用场所



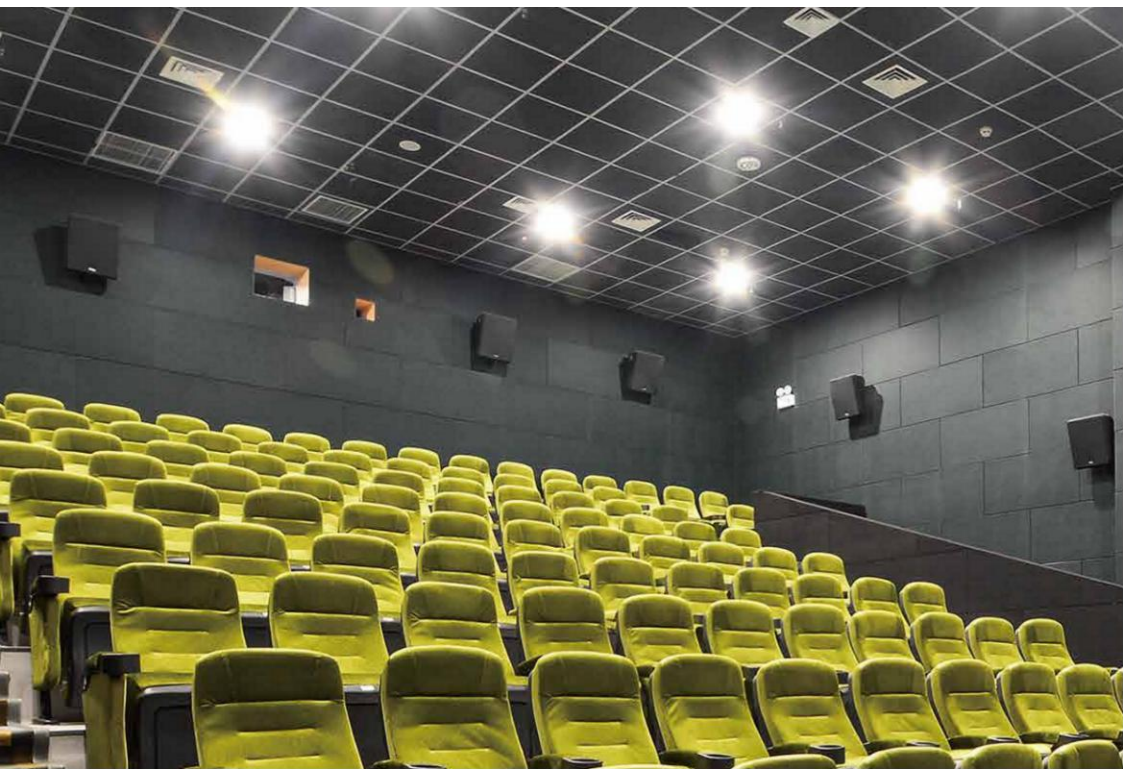

Technical data/产品参数


MAIN MATERIAL/基材	Torrefaction compounded high density fiberglass wool 干式合成高强度玻璃纤维棉
FACE/表面	Special painted laminated with decorative fiberglass tissue- 经特殊工艺处理的玻璃纤维毡
DESIGN/花色	White spray/white paint/black spray/colorful as demanded 白色平面/白色喷点/黑色平面/彩色, 可依客户要求制作
FIRE-RESISTANT/防火性	CLASS A, tested by SGS (EN13501-1:2007+A1:2009) CLASS A, tested by national authoritative departments (GB 8624-2012) A级, 欧洲检测标准 (EN13501-1-2007+A1:2009) A级, 国家权威部门检测 (GB 8624-2012)
NRC/吸音性	0.8-0.9 tested by SGS(ENISO354:2003 ENISO11654:1997) 0.9-1.0 tested by national authoritative departments (GB/T20247-2006/ISO354:2003) 0.8-0.9欧洲检测标准(ENISO354:2003 ENISO11654:1997) 0.9-1.0 国家权威部门检测(GB/T20247-2006/ISO354:2003)
THERMAL-RESISTANT/热阻	≥0.4(m ² ·k)/w
HUMIDITY/抗潮抗下陷性	Dimensionally stable with RH up to 95% at 40°C No sagging,warping or delaminating 在室内温度40°C以及相对湿度是90%以下, 尺寸稳定
MOISTURE RATE/含水率	≤1%
ENVIRONMENTAL IMPACT/环保性	Tiles and packings are fully recyclable 成品和包装可再循环使用
SAFETY/安全	Limit of radionuclides in building materials Specific activity of 226Ra:Ir≤1.0 Specific activity of 226Ra,232Th,40K:Ir≤1.3 放射性核素限量 内照射指数: Ir≤1.0 外照射指数: Ir≤1.3
CERTIFICATES/品质保证	SGS,ISO9001:2008, CE,KFI
NORMAL SIZE/常规尺寸	600x600/600x1200mm,other size to order/尺寸可定做 Width≤1200mm,Length≤2700mm/宽度≤1200mm,长度≤2700mm
NORMAL DENSITY/常规密度	100kg/m ³ ,special density can be supplied 100kg/m ³ 特殊密度可定制

Loading capacity/装运


SIZE(MM)/产品尺寸	THICKNESS/厚度	PACKING/包装件数	LOADING QUANTITY(40HQ)/装柜数量
600x600mm	12mm	25PCS/CTN	13300PCS/532CTNS/4788SQM
600x1200mm			6650PCS/266CTNS/4788SQM
600x600mm	15mm	20PCS/CTN	10640PCS/532CTNS/3830.4SQM
600x1200mm			5320PCS/266CTNS/3830.4SQM
600x600mm	20mm	15PCS/CTN	7980PCS/532CTNS/2872.8SQM
600x1200mm			3990PCS/266CTNS/2872.8SQM
600x600mm	25mm	12PCS/CTN	6384PCS/532CTNS/2298.2SQM
600x1200mm			3192PCS/266CTNS/2298.2SQM

Other Size to Order:600x1800,600x2400,1200x1200(mm)

■ Structure / 结构

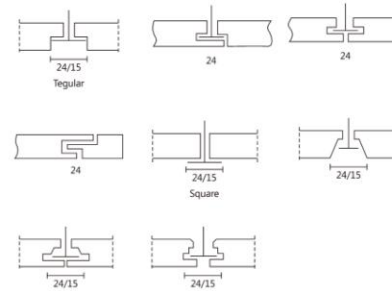

■ Installation diagram / 安装示意图

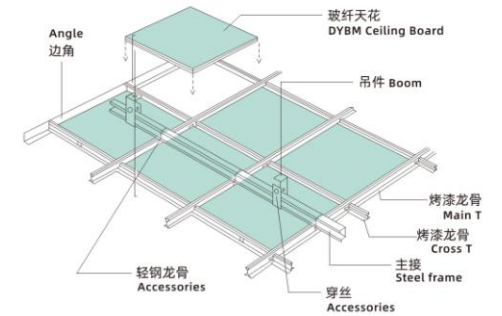

■ FACE / 花色



■ Main characteristic / 主要产品特性

Excellent fire-resistant 极佳的防火功能(A1)
 Excellent sound insulation 极佳的吸音功能
 Light weight and no sagging, warping or delaminating 质轻, 不易变形
 Green eco-friendly building material 绿色环保建材




■ Loading capacity/装运

SIZE(MM)/产品尺寸	THICKNESS/厚度	PACKING/包装件数	LOADING QUANTITY(40HQ)/装柜数量
600x600mm	12mm	25PCS/CTN	13300PCS/532CTNS/4788SQM
600x1200mm			6650PCS/266CTNS/4788SQM
600x600mm	15mm	20PCS/CTN	10640PCS/532CTNS/3830.4SQM
600x1200mm			5320PCS/266CTNS/3830.4SQM
600x600mm	20mm	15PCS/CTN	7980PCS/532CTNS/2872.8SQM
600x1200mm			3990PCS/266CTNS/2872.8SQM
600x600mm	25mm	12PCS/CTN	6384PCS/532CTNS/2298.2SQM
600x1200mm			3192PCS/266CTNS/2298.2SQM

Other Size to Order:600x1800,600x2400,1200x1200(mm)

■ Technical data/产品参数

MAIN MATERIAL/基材	Torrefaction compounded high density rock wool 干式合成高强度岩棉
FACE/表面	Special painted laminated with decorative fiberglass tissue 经特殊工艺处理的玻璃纤维毡
DESIGN/花色	White spray/white paint/black spray/colorful as demanded 白色平面/白色喷点/黑色平面/彩色, 可依客户要求制作
FIRE-RESISTANT/防火性	CLASS A ,tested by SGS (EN13501-1:2007+A1:2009) CLASS A ,tested by national authoritative departments (GB 8624-2012) A级, 欧洲检测标准 (EN13501-1-2007+A1:2009) A级, 国家权威部门检测 (GB 8624-2012)
NRC/吸音性	0.8-0.9 tested by SGS(ENISO354:2003 ENISO11654:1997) 0.9-1.0 tested by national authoritative departments (GB/T20247-2006/ISO354:2003) 0.8-0.9 欧洲检测标准(ENISO354:2003 ENISO11654:1997) 0.9-1.0 国家权威部门检测(GB/T20247-2006/ISO354:2003)
THERMAL-RESISTANT/热阻	≥0.4(m ² .k)/w
HUMIDITY/抗潮抗下陷性	Dimensionally stable with RH up to 95% at 40°C. No sagging,warping or delaminating 在室内温度40℃以及相对湿度是90%以下, 尺寸稳定
MOISTURE RATE/含水率	≤1%
ENVIRONMENTAL IMPACT/环保性	Tiles and packings are fully recyclable 成品和包装可再循环使用
SAFETY/安全	Limit of radionuclides in building materials Specific activity of 226Ra,Ira≤1.0 Specific activity of 226Ra,232Th,40K,Ir≤1.3 放射性核素限量 内照射指数: Ira≤1.0 外照射指数: Ir≤1.3
CERTIFICATES/品质保证	SGS,ISO9001:2008, CE,KFI
NORMAL SIZE/常规尺寸	600x600/600x1200mm,other size to order/尺寸可定做 Width≤1200mm,Length≤2700mm/宽度≤1200mm,长度≤2700mm
NORMAL DENSITY/常规密度	150kg/m ³ ,special density can be supplied 150kg/m ³ ,特殊密度可定制

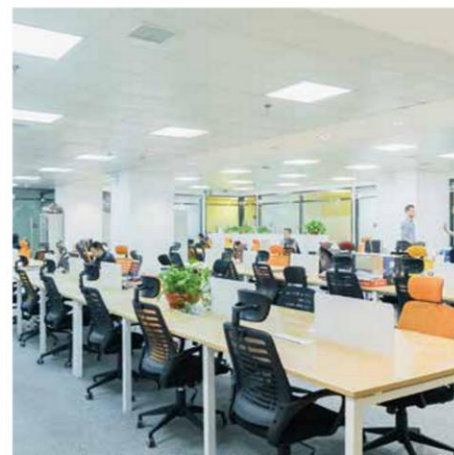

Huamei

悬挂系统

Acoustical Suspension System

1 平挂系列产品
ACOUSTIC CLOUDS

2 垂挂系列产品
ACOUSTIC BAFFLES

水平悬挂
ACOUSTIC CLOUDS



■ Description / 产品描述

悬挂吊顶吸音板是一种以玻璃纤维为主要材料，加入适量的粘结剂、防潮剂、防腐剂，经加工、烘干、饰面而形成的一种新型吊顶装饰材料。

悬挂吊顶吸音板适用于广播电台、电视台录音室、演播室、学校、体育馆、大剧院、图书馆、文化中心、礼堂、多功能厅、会议室及音乐厅等对音质要求较高的场所。


悬挂吊顶吸音板具有质轻、吸声、防火、隔热、保温、美观大方、施工方便等特点。适用于各类公共建筑物的吊顶装饰。

Suspended acoustic ceiling is combined of fiberglass and appropriate amount of binder, moisture-proof agent and preservative, and then formed by processing, drying and finishing, finally to become a new type of ceiling decoration material.

Suspended acoustic ceiling is suitable for radio stations, television studios, studios, schools, gymnasiums, theaters, libraries, cultural centers, auditoriums, multi-functional halls, conference rooms and concert halls and other places where need higher requirements for sound absorption quality.

It has the characteristics of light weight, sound absorption, fire prevention, heat insulation, heat preservation, elegant appearance and convenient construction. In a word, it is suitable for ceiling decoration of all kinds of public buildings.


■ Installation / 安装示意

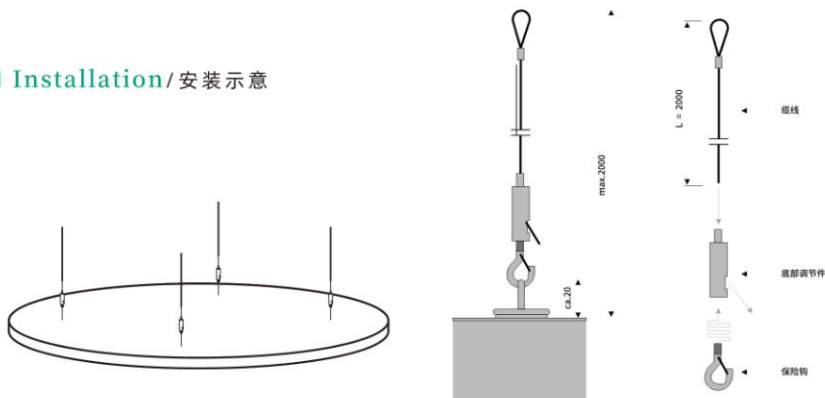

■ Face / 花色



■ Structure / 结构

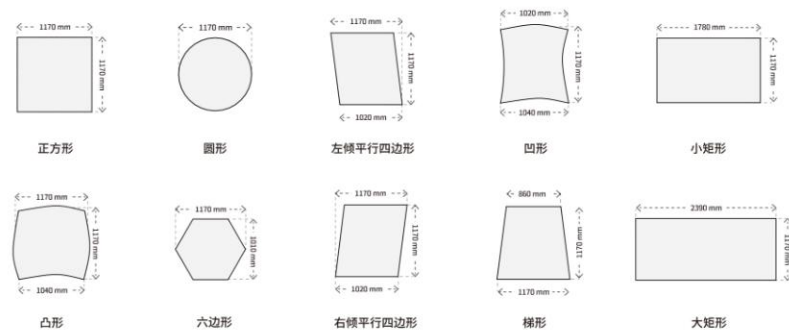

* 厚度可定做30--100mm



垂直悬挂
ACOUSTIC BAFFLES



弧形悬挂
ARC BAFFLES




Structure / 结构

长方形 名义尺寸 (mm)


高 x 长 x 宽	片/包
200 x 1200 x 40 mm	4
200 x 1600 x 40 mm	4
400 x 1200 x 40 mm	4
400 x 1600 x 40 mm	4
400 x 1800 x 40 mm	4
500 x 1200 x 40 mm	4
500 x 1600 x 40 mm	4

波浪形 名义尺寸 (mm)

高 x 长 x 宽	片/包
400 x 1200 x 40 mm	4
400 x 1800 x 40 mm	4

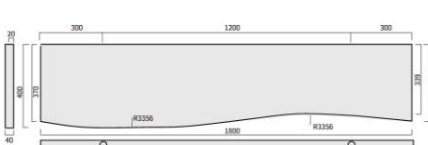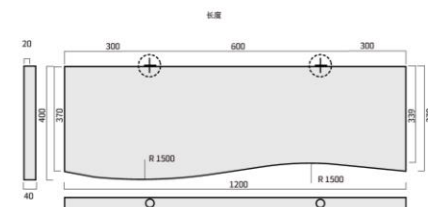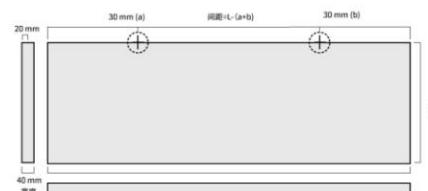


Face / 花色

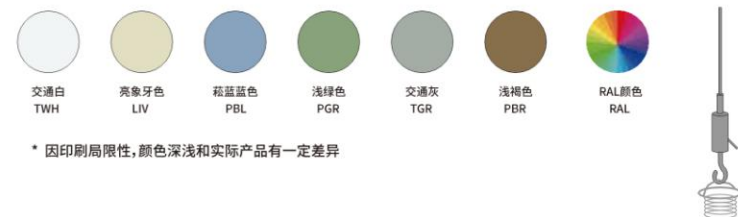

* 因印刷局限性, 颜色深浅和实际产品有一定差异

Structure / 结构

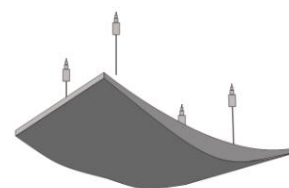


* 厚度可定做30-100mm
* Thickness can made 30-100mm

悬吊组件

Suspension components

- 缆线 Wire Line
- 连接帽 Screw Cap
- 底部调节器 Screw Cap
- 保险钩 Hook
- 自攻螺丝与面板相连 Spring


平面图

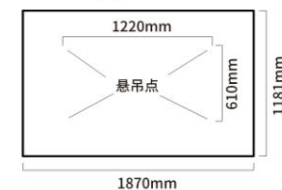

平面图





细节

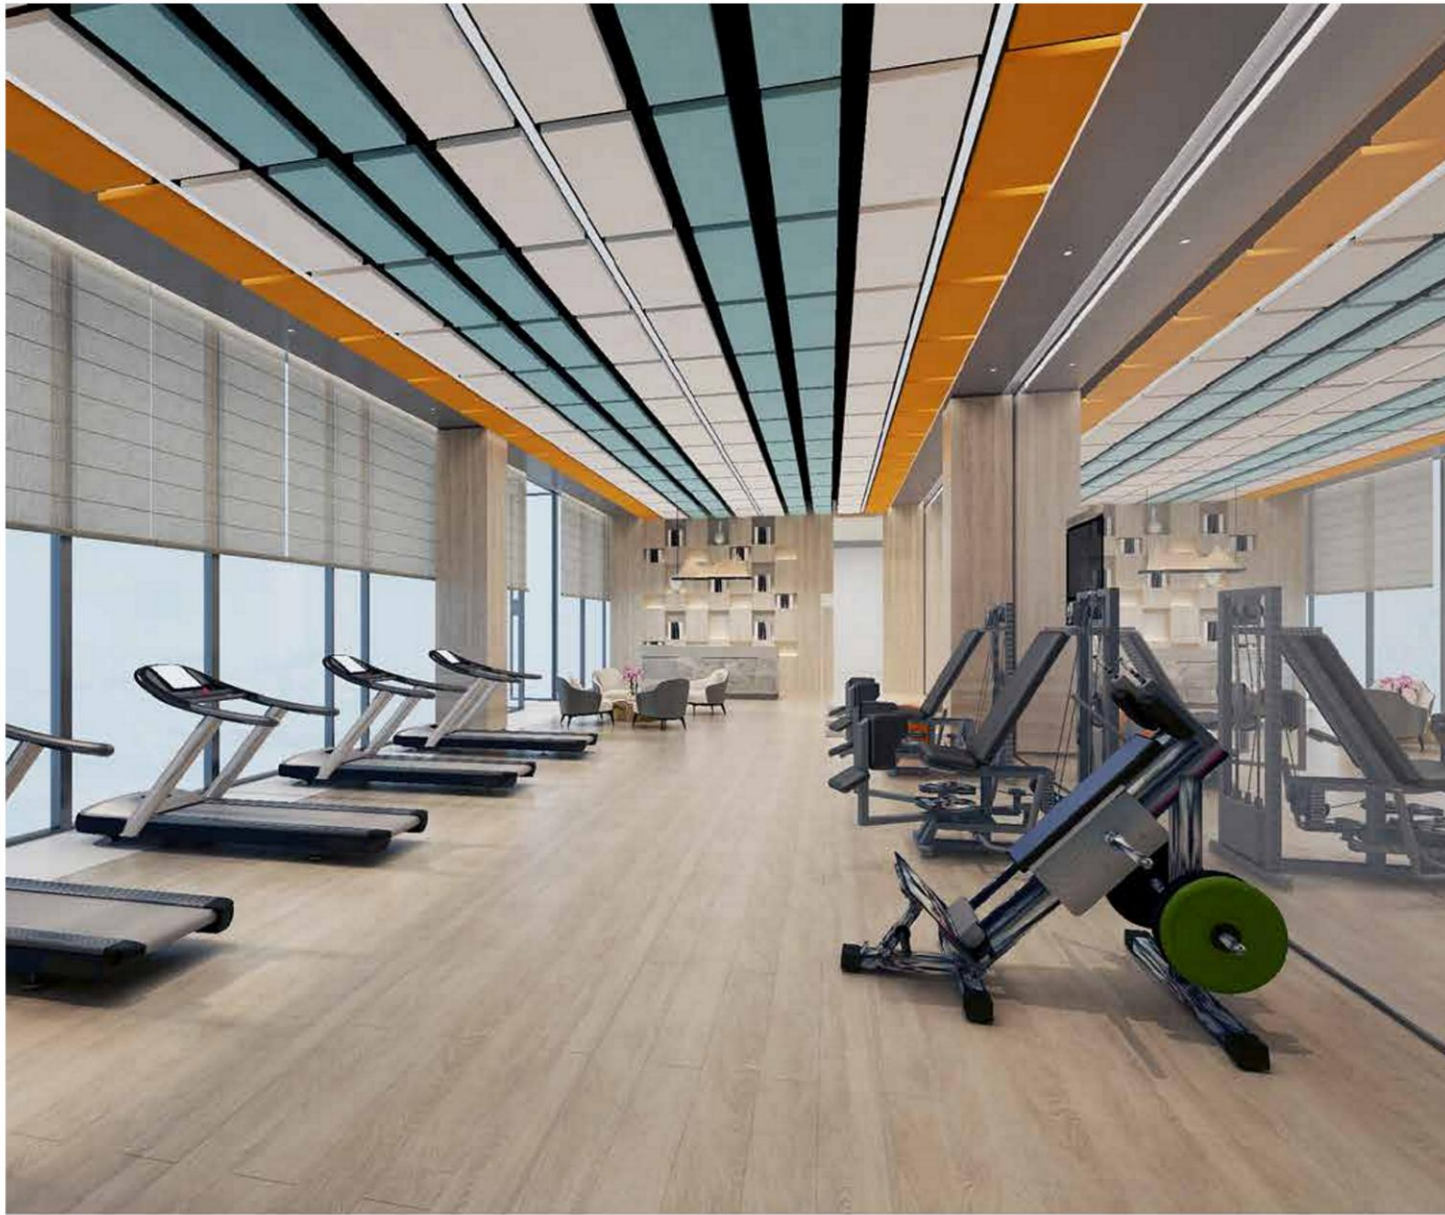

墙面系统

Acoustical Wall System

- 1 布艺软包墙板
FABRIC COVERED WALL PANEL
- 2 艺术墙板
ACOUSTICAL ART PANELS
- 3 穿孔墙板
PERORATED WALL PANEL

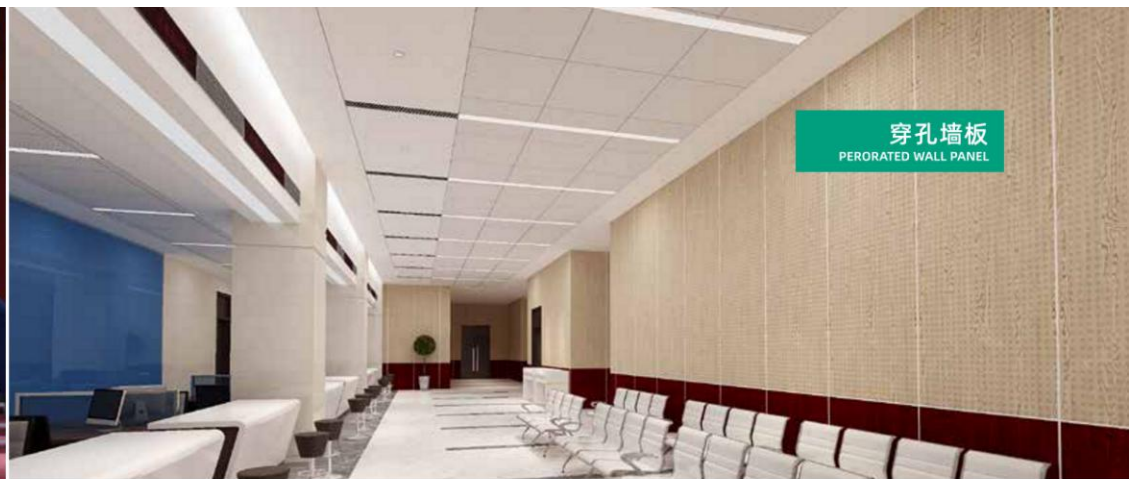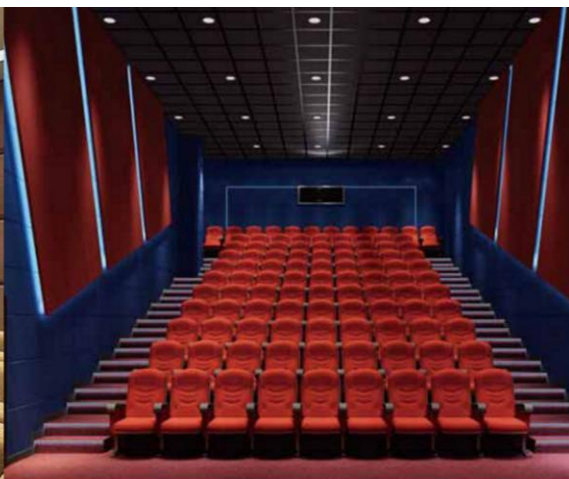

■ Structure/ 结构

直角边
Square Edge



楔形边
Bevel Edge




■ Main characteristic/主要产品特性


Excellent fire-resistant/最佳的防火功能
 Excellent sound insulation 最佳的吸音功能
 Light weight and no sagging, warping or delaminating 质轻, 不易变形
 Green eco-friendly building material 绿色环保建材



■ Face/花色



■ Application/应用场所

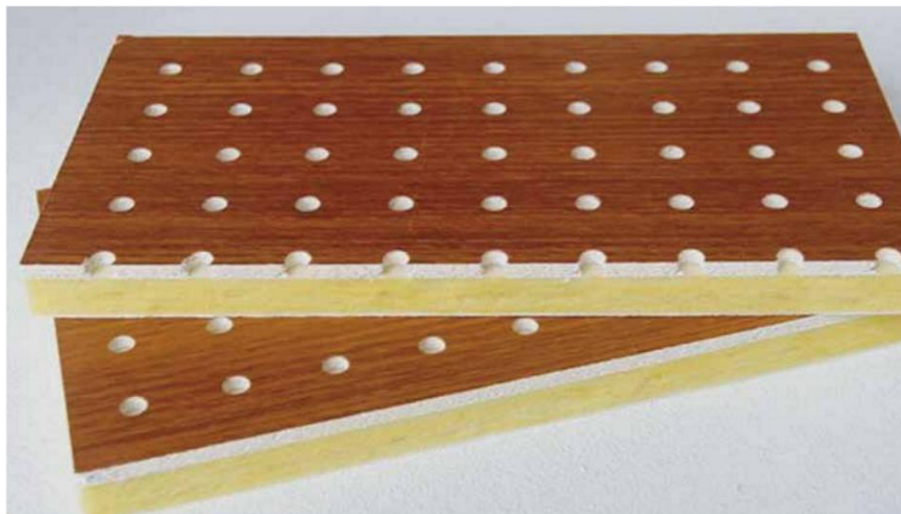


艺术墙板 ACOUSTICAL ART PANELS



Face/花色



Structure/结构

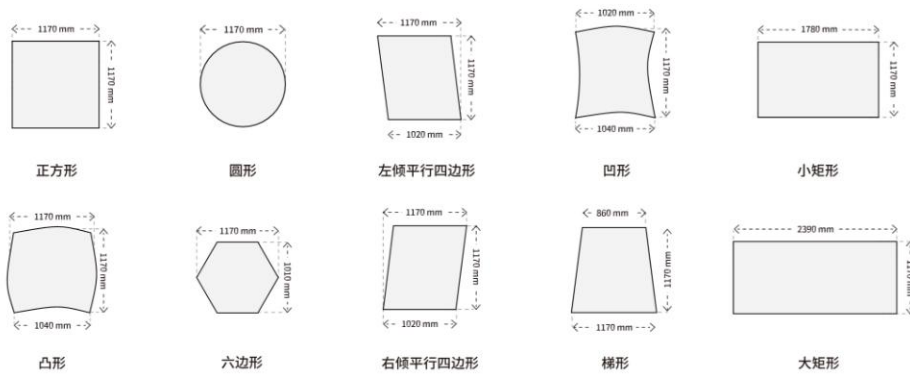


Main characteristic/主要产品特性

Excellent fire-resistant/极佳的防火功能
 Excellent sound insulation 极佳的吸音功能
 Light weight and no sagging, warping or delaminating/质轻, 不易变形
 Green eco-friendly building material 绿色环保建材



Installation method/安装方法

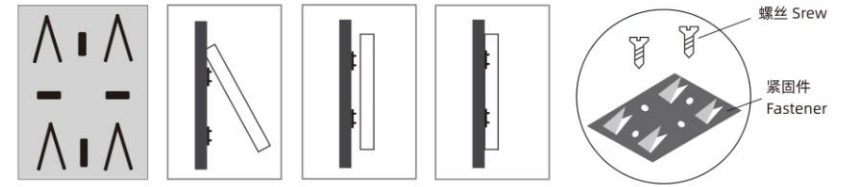

第一步: 用两个或四个螺丝把紧固件固定到墙上合适的位置。

Step 1: Fix the fastener to the appropriate position on the wall with two or four screws.

第二步: 紧固件固定好之后, 把吸音板固定到固定件上。

一张板子大约需要2-4个紧固件。

Step 2: After the fasteners are fixed, fix the acoustic wall panel to the Fasteners.

One Acoustic wall panel requires approximately 2-4 fasteners

Loading capacity/装运

SIZE(MM)/产品尺寸	THICKNESS/厚度	PACKING/包装件数	LOADING QUANTITY(40HQ)/装柜数量
600x600mm	12mm	25PCS/CTN	13300PCS/532CTNS/4788SQM
600x1200mm	12mm	25PCS/CTN	6650PCS/266CTNS/4788SQM
600x600mm	15mm	20PCS/CTN	10640PCS/532CTNS/3830.4SQM
600x1200mm	15mm	20PCS/CTN	5320PCS/266CTNS/3830.4SQM
600x600mm	20mm	15PCS/CTN	7980PCS/532CTNS/2872.8SQM
600x1200mm	20mm	15PCS/CTN	3990PCS/266CTNS/2872.8SQM
600x600mm	25mm	12PCS/CTN	6384PCS/532CTNS/2298.2SQM
600x1200mm	25mm	12PCS/CTN	3192PCS/266CTNS/2298.2SQM

Other Size to Order: 600x1800, 600x2400, 1200x1200(mm)

Technical data/产品参数

MAIN MATERIAL/基材	Torrefaction compounded high density fiberglass wool 干式合成高强度玻璃纤维棉	
FACE/表面	Fireproof decorative fabric 防火装饰面	
DESIGN/花色	As demanded 依客户要求制作	
FIRE-RESISTANT/防火性	CLASS A, tested by SGS (EN13501-1:2007+A1:2009) A级, 欧洲检测标准 (EN13501-1:2007+A1:2009)	
NRC/吸音性	0.8-0.9 tested by SGS(ENISO354:2003 ENISO11654:1997) 0.8-0.9 欧洲检测标准(ENISO354:2003 ENISO11654:1997)	
THERMAL-RESISTANT/热阻	≥0.4(m ² .k)/w	
HUMIDITY/抗潮抗下陷性	Dimensionally stable with RH up to 95% at 40°C No sagging, warping or delaminating 在室内温度40°C以及相对湿度是90%以下, 尺寸稳定	
MOISTURE RATE/含水率	≤1%	
ENVIRONMENTAL IMPACT/环保性	Tiles and packings are fully recyclable 成品和包装可再循环使用	
SAFETY/安全	Limit of radionuclides in building materials Specific activity of 226Ra: Irα≤1.0 Specific activity of 226Ra, 232Th, 40K: Irα≤1.3	放射性核素限量 内照射指数: Irα≤1.0 外照射指数: Ir≤1.3
CERTIFICATES/品质保证	SGS, ISO9001:2008, CE, KFI	
NORMAL SIZE/常规尺寸	size to order 尺寸可定做 Width≤1200mm, Length ≤2700mm 宽度≤1200mm, 长度 ≤2700mm	
NORMAL DENSITY/常规密度	100kg/m ³ , special density can be supplied 100kg/m ³ , 特殊密度可定制	



VERIFICATION OF CONFORMITY

No. IN-XM-CP-5612-18069

It has been stated that the construction product
FIBERGLASS CEILING
Intended use: Suspended ceiling membrane component for use internally in buildings

produced in the manufacturing plant and placed on the market by
SHANDONG HUAMEI BUILDING MATERIALS CO., LTD
LUOZHANG DISTRICT, LINYI CITY, SHANDONG PROVINCE, CHINA

is submitted by the manufacturer to the further testing of samples taken at the factory in accordance with a prescribed test plan and that the third party- SGS-CSTC Standards Technical Services Co., Ltd. has performed the determination of the product type as required for Regulation 305/2011/EU and the assessment and verification of conformity at system 4.

This verification attests that all provisions concerning assessment of constancy of performance at system 4 and the performances described in Annex ZA of the standards.

EN 13964:2014 Suspended ceilings - Requirements and test methods

were applied and that the relevant test report No. is **XMIN180901795CCM**

This verification is customer voluntary act and refers to the tested samples only-type representative of the tested product. The manufacturer is obligated to apply factory production control.

This verification is valid from Oct.29, 2018 until Oct.28, 2021 and remains valid as long as the manufacturing conditions in the plant or the factory production control itself are not modified significantly.

Issued since Oct.29, 2018

Authorised by

Signer
Manager

Industrial Services

SGS-CSTC Standards Technical Services Co., Ltd. Xiamen Branch
31 Yuanzhong Road, Xiang'an Torch Industrial Zone, Xiamen, Fujian Province, China
T +86 (0)592 5766485 F +86 (0)592 5765560

Industrial.China@sgs.com

www.sgs.com

CE-CPR VOC 130701



This document is issued, on the Client's behalf, by the Company under its General Conditions of Service printed overleaf. The Client's attention is drawn to the limitation of liability, indemnification and jurisdiction clauses defined therein.

Any other holder of this document is aware that information contained herein reflects the Company's findings at the time of its intervention and is not to be taken as a representation of the Company's responsibility to its Client and that document does not constitute part of a transaction from exercising all their rights and obligations under the transaction document.

Huamei SGSPAPER
19139289



Huamei



风雨同舟
砥砺前行